


## Description

Heterogeneous indoor floorcovering, 6.2mm thick.

1. Engineered surface embossing
2. Top Clean XP treatment
3. Pure transparent vinyl wear layer
4. High definition printing
5. Unwoven fiberglass
6. Homogeneous calendered sheet - recycled vinyl
7. **NEW! XCS foam**, extremely dense cellular structure for excellent recovery

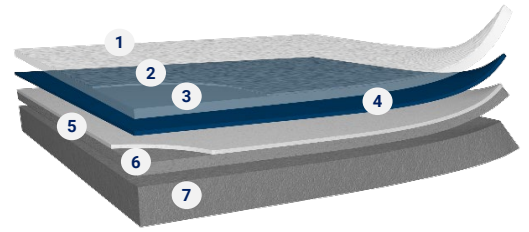

PROPERTIES	STANDARDS	OMNISPORTS REFERENCE MULTI-USE
------------	-----------	--------------------------------

### DECLARATION OF PERFORMANCE

0120-080-DoP-2020-06

### CLASSIFICATION

Type of floor covering	EN 14904	Heterogeneous indoor floorcoverings
------------------------	----------	-------------------------------------

### TECHNICAL CHARACTERISTICS

Total thickness	ISO 24346 (EN 428)	6.2mm
Total weight	ISO 23997 (EN 430)	3950g/m <sup>2</sup>
Width	ISO 24341 (EN 426)	2m
Length	ISO 24341 (EN 426)	20.51m

### REQUIREMENTS FOR SAFE USE

Friction	EN 13036-4	80 to 110
Shock absorption	EN 14808	P1 ≥25%
Vertical deformation	EN 14809	P1
Specular gloss	EN ISO 2813	≤30

### TECHNICAL PERFORMANCES

Vertical ball behaviour	EN 12235	≥90%
Reaction to fire	EN 13501-1	Cfl-s1*
Resistance to wear	EN ISO 5470-1	≤1g
Resistance to indentation	Average measured value EN 1516	≤0.10mm ≤0.50mm
Resistance to a rolling load	EN 1569	≤0.50mm
In room noise	NFS-074	Class A ≤65dB
Thermal resistance	EN ISO 14456	Approx. 0.09 m <sup>2</sup> K/W Compatible with underfloor heating

### Colors available



\* glued and GreenLay installation on concrete and Lumaflex sub-construction  
Installation and maintenance guides available on request

Technical data in force as from the date of publication (10/2020).

The values above correspond to laboratory test (no in situ test), and are subject to modifications for the benefit of further improvement.

For more detailed technical information, please contact Tarkett Sports.

Colors of the products shown in the photos or samples are indicative only. There may be differences in color, gloss and embossing structure between the products sold and photos or samples.