


REFLEX M EVOLUTION

Technical data



PROPERTIES	STANDARDS	REFLEX M EVOLUTION
DECLARATION OF PERFORMANCE		
0020-0027-DoP-2023-01		
CLASSIFICATION		
Type of floor covering	EN 14904	Area elastic sports flooring
TECHNICAL CHARACTERISTICS		
Total thickness	EN ISO 24340	56mm
Wear layer thickness	EN ISO 13647	3.5mm
Total weight	EN ISO 23997	15.9kg/m ²
Width	EN ISO 24342	194mm
Length	EN ISO 24341	2520mm
REQUIREMENTS FOR SAFE USE		
Friction	EN 13036-4	80 to 110
Shock absorption	EN 14808	A4 ≥55% <75%
Vertical deformation	EN 14809	A4
Specular gloss	EN ISO 2813	≤45
TECHNICAL PERFORMANCES		
Vertical ball behaviour	EN 12235	≥90%
Reaction to fire	EN 13501-1	Cfl-s1
Resistance to wear	EN ISO 5470-1	≤0.8g
Resistance to indentation	Average measured value EN 1516	Compliant ≤0.50mm
Resistance to a rolling load	EN 1569	Compliant
PACKAGING		
Tarfilm	-	Roll of 120m ² 2440mm x 60mm x 34mm
Battens with PU foam included	-	4 units/pack= 9.76lm (1 pack= 2.63m ² installed)
Wooden boards 22mm	-	4 slats/pack (1.95m ²)

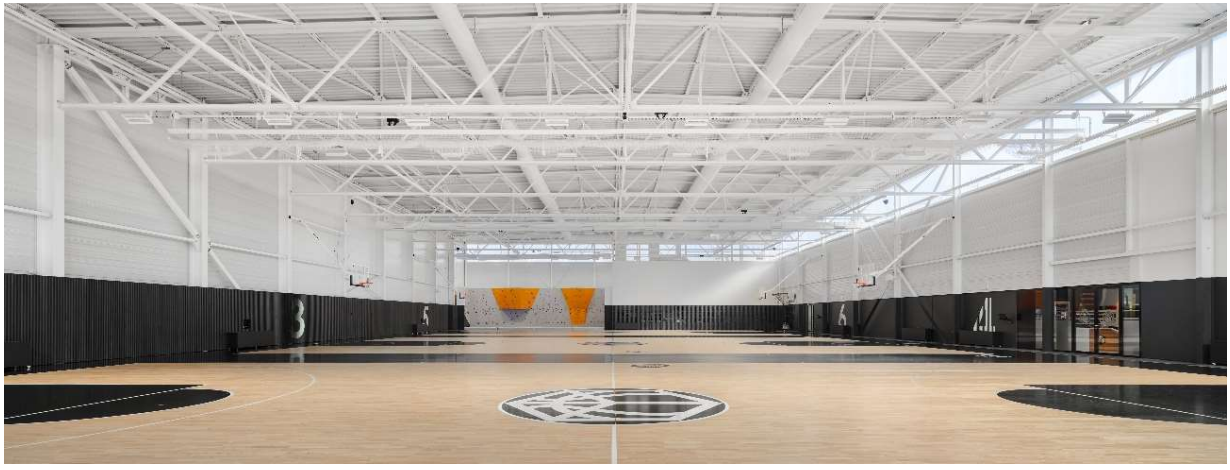

Installation and maintenance guides available on Tarkett Sports Indoor website

Technical data in force as from the date of publication (02/2024).

The values above correspond to laboratory test (no in situ test) and are subject to modifications for the benefit of further improvement.

For more detailed technical information, please contact Tarkett Sports.

Colors of the products shown in the photos or samples are indicative only. There may be differences in color, gloss and embossing structure between the products sold and photos or samples.