


**DESCRIPTION**

Ultra resistant protective floor coverings rolls. A cost-effective solution to protect your floor from foot traffic and light weights:

1. Transparent wear layer
2. Decorated compact non-woven impregnation
3. Calendered sheet + single glass veil reinforcement

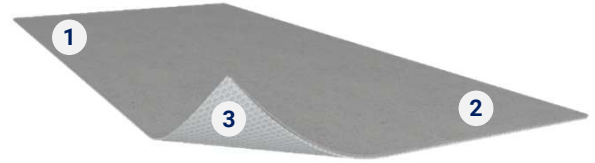

PROPERTIES	STANDARDS	TOUCHDOWN
------------	-----------	-----------

**DECLARATION OF PERFORMANCE**

0120-013-DoP-2021-02

**CLASSIFICATION**

Type of flooring	EN ISO 10582	Compact vinyl floorcoverings
------------------	--------------	------------------------------


**TECHNICAL CHARACTERISTICS**

Total thickness	EN ISO 24346	1.45 mm
Total weight	EN ISO 23997	2.2 kg/m <sup>2</sup>
Width	EN ISO 24341	2 m
Length	EN ISO 24341	27lm

**TECHNICAL PERFORMANCES**

Static indentation	EN ISO 24343-1	0.10 mm
Dimensional stability	EN ISO 23999	<0.1%
Reaction to fire	EN 13501-1	Bfl-s1*
Impact noise reduction	EN ISO 717-2	ΔLw=2dB
Electrical properties	EN 1081	R1 > 10 <sup>9</sup> ohms
Antistatic properties	EN 1815	<2kV
Formaldehyde	-	No formaldehyde
Pentachlorophenol	-	No pentachlorophenol

**AVAILABLE COLOURS**

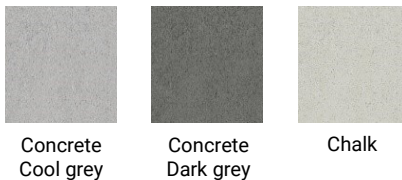

\* On concrete and wood supports

**Installation :** Touchdown rolls can be installed tight or with an overlap of 5 to 10 cm

**Routine maintenance :** remove dust and gravels by sweeping or vacuum cleaning, wash mechanically by using an automatic scrubber machine fitted out with 3M red pads and a diluted neutral detergent.

**Periodical maintenance:** wash mechanically by using an automatic scrubber machine fitted out with 3M red pads and a diluted alkaline detergent, apply the mix (water/alkaline detergent) without vacuuming, let the product soak on the floor for 5 minutes, vacuum the surface, and then clean again the floor only with water.

*Technical data in force as from the date of publication (02/2024).*

*The values above correspond to laboratory test (no in situ test) and are subject to modifications for the benefit of further improvement. For more detailed technical information, please contact Tarkett.*

*Colors of the products shown in the photos or samples are indicative only. There may be differences in color, gloss and embossing structure between the products sold and photos or samples.*

